
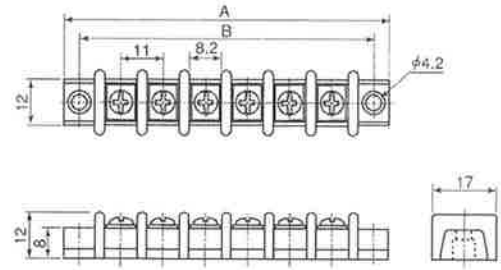
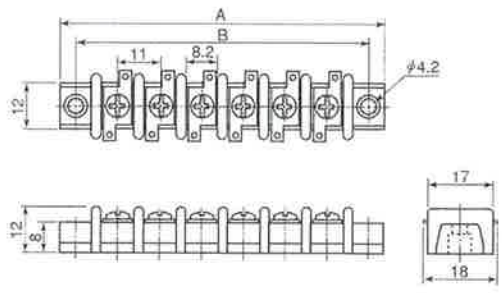
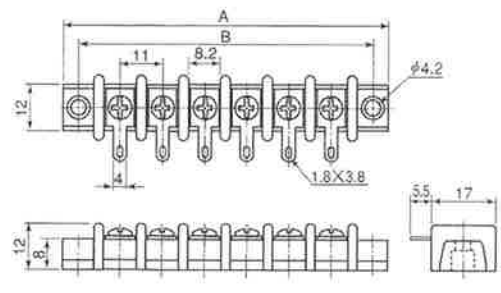
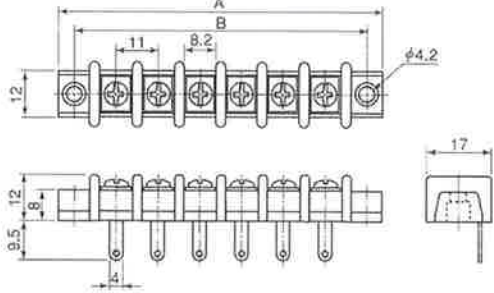

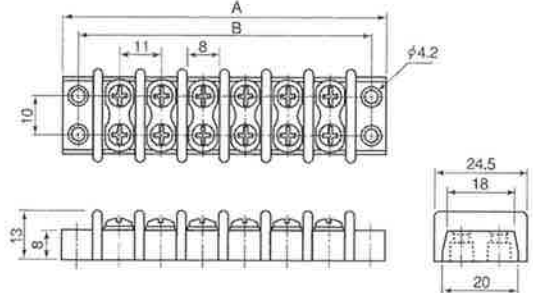


<p>■TBK-17R形</p>  <p>●端子間ピッチ 11mm      端子ネジ M3×6</p>	<p>■TBK-17形</p> 
<p>■TBK-17R形</p> 	<p>■TBK-17H形</p> 
<p>■TBK-17T形</p> 	
 <p>●端子間ピッチ 11mm      端子ネジ M3×6</p>	<p>■TBK-24形</p>  <p>端子ネジ M3.5×6</p>

### ■寸法表

P 数	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
A	30	41	52	63	74	85	96	107	118	129	140	151	162	173	184	195	206	217	228	239	250	261
B	22	33	44	55	66	77	88	99	110	121	132	143	154	165	176	187	198	209	220	231	242	253

### ■仕様

- ◆定格250V 6A (TBK-17タイプ)    ◆定格250V 15A (TBK-24タイプ)
- 絶縁抵抗 DC500V 100MΩ以上    ●耐電圧AC2000V 1分間以上    ●フェノール (UL-94V-0材料使用)